


Booleans & selection

Java Reference

if / else

`if` runs a block when a condition 条件 is true; `else if` and `else` add more cases. The condition goes in (), the block in { }.

```
public class Main {  
    public static void main(String[] args) {  
        int score = 72;  
        if (score >= 80) {  
            System.out.println("A");  
        } else if (score >= 60) {  
            System.out.println("B");  
        } else {  
            System.out.println("fail");  
        }  
    }  
}
```

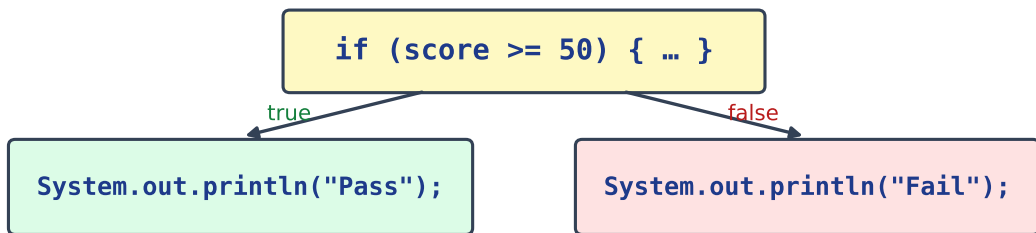

Exam tip: always use braces; else if chains more cases; only one branch runs

if chooses the true branch; else the false branch

Logical operators & comparisons

Compare with `==`, `!=`, `<`, `>`, `<=`, `>=` — a comparison 比较 gives a **boolean**. Combine with `&&` (and), `||` (or), `!` (not) — the logical operators 逻辑运算符. For **Strings**, use `.equals(...)`, **not** `==`.

```

public class Main {
    public static void main(String[] args) {
        int age = 16;
        boolean member = true;
        System.out.println(age >= 18 && member);    // false
        String a = "hi";
        System.out.println(a.equals("hi"));        // true
    }
}

```

switch

switch chooses among many fixed values. Each case ends with break; default is the fallback.

```

public class Main {
    public static void main(String[] args) {
        int day = 3;
        switch (day) {
            case 1: System.out.println("Mon"); break;
            case 3: System.out.println("Wed"); break;
            default: System.out.println("other");
        }
    }
}

```

Common mistakes

- A condition must be a boolean; if (x = 5) does not compile (use ==).
- Each switch case needs a break;, or control falls through to the next case.
- && and || are the logical operators; & and | are bitwise.